


Hannethane-XP

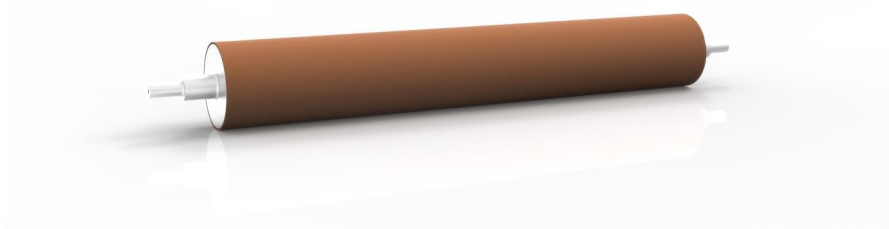

Cover Type:	Polyurethane	
Possible applications:	<p>All industrial domains : rollers submitted to high load and heavy abrasion, also in humid and oily environments</p> <p>Metals industry : snubber and pinch rollers, hold-down and pressure rollers, tension, steering and traction rolls, pressure rings</p> <p>Transformation of paper, plastic film, tissue and textiles, décor products, metal packaging, concrete slates, wood, glass etc. : pressure, squeeze and backing rollers</p> <p>Technical parts, wheels and rings</p>	
Hardness Range:	70, 75, 80, 85, 90, 91, 94, 95 Shore A	
Recommended Cover Thickness:	min. 10 mm - max. 25 mm	
Temperature resistance:	Dry: Wet:	continuous 80°C / peak 95°C continuous 50°C / peak 60°C
Properties and advantages:	<p>Very high abrasion, tear and cut-in resistance</p> <p>Resistant to high load applications, excellent impact resistance</p> <p>Very good resistance to mineral oil</p> <p>Good hydrolysis resistance up to 60 °C, fair resistance to diluted acids up to 40 °C and to alkaline solutions up to 60 °C</p>	
Chemical resistance:	Acid solutions: Alkaline solutions: Hot water and steam: Ozone: Oil and grease: Aromatic solvents (toluene, benzene,...): Chlorinated solvents: Polar solvents (MEC, ether, acetate,...): Alcohols (ethanol, IPA,...):	Moderate Good Not suited Good Very good Moderate Not suited Not suited Good
Recommended cleaning products:	(Tepid) water, soap, industrial cleaners, cleaning fuel, terpentine, with limited use : alcohol	