


# Hannethane-CR

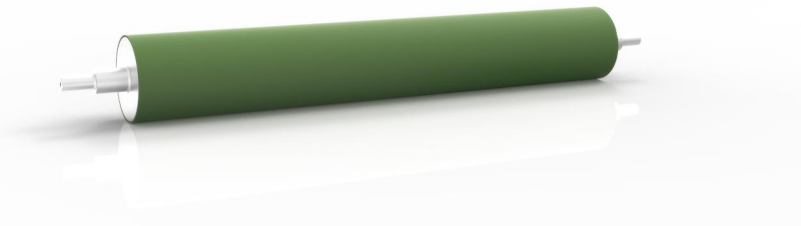

<b>Cover Type:</b>	Special polyurethane
<b>Possible applications:</b>	Bridle, deflector and pinch rolls for the production of metal strip (steel, stainless steel, aluminium and non-ferrous strip), specifically in oily and humid environment  Driving rolls and wheels in cardboard machines  For all industries: transport and driving rolls where slip occurs
<b>Hardness Range:</b>	50, 60, 70, 75, 80, 85, 90 Shore A
<b>Recommended Cover Thickness:</b>	min. 10 mm - max. 20 mm
<b>Temperature resistance:</b>	Dry: continuous 80°C / peak 90°C Wet: continuous 50°C / peak 60°C
<b>Properties and advantages:</b>	Very good driving properties thanks to the constant roughness technology, even in humid conditions  Very good abrasion resistance  Very good resistance to cut and tear  Good resilience
<b>Specific characteristics:</b>	Permanent surface roughness
<b>Chemical resistance:</b>	Acid solutions: Moderate Alkaline solutions: Moderate Hot water and steam: Not suited Ozone: Good Oil and grease: Very good Aromatic solvents (toluene, benzene,...): Not suited Chlorinated solvents: Not suited Polar solvents (MEC, ether, acetate,...): Not suited Alcohols (ethanol, IPA,...): Good
<b>Recommended cleaning products:</b>	(Tepid) water, soap, industrial cleaners, cleaning fuel, terpentine, with limited use : alcohol