


FlexoGraf-SL

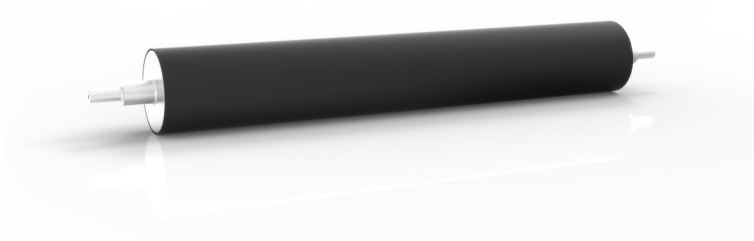

Cover Type:	Rubber	
Possible applications:	Fountain rollers for flexographic printing in cardboard and plastic film industry, with water based inks	
Hardness Range:	60, 65, 70, 75 Shore A	
Recommended Cover Thickness:	min. 10 mm - max. 25 mm	
Temperature resistance:	Dry:	continuous 100°C / peak 110°C
	Wet:	continuous 70°C / peak 80°C
Properties and advantages:	Excellent compatibility with water based inks with excellent ink transfer capacity Excellent oil and grease resistance Good heat resistance Good diluted acids resistance Low resistance to chlorinated and ketone solvents	
Chemical resistance:	Acid solutions:	Good
	Alkaline solutions:	Good
	Hot water and steam:	Good
	Ozone:	Very good
	Oil and grease:	Excellent
	Aromatic solvents (toluene, benzene,...):	Moderate
	Chlorinated solvents:	Not suited
	Polar solvents (MEC, ether, acetate,...):	Not suited
Recommended cleaning products:	Water and compatible solvents	