


# MultiPrint-XP

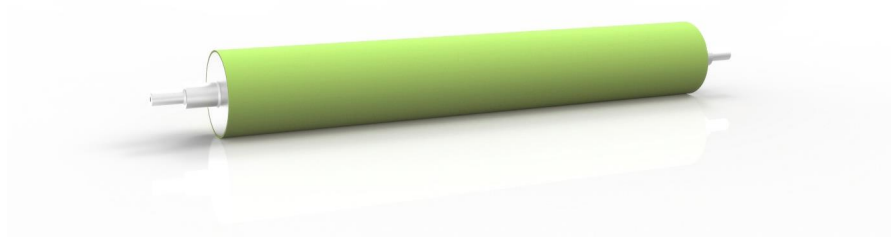

<b>Cover Type:</b>	Special rubber
<b>Possible applications:</b>	Inking rollers Very well adapted for dry offset printing on metal can packaging for example Very well adapted for narrow web printing, possible use with conventional and UV inks
<b>Hardness Range:</b>	45, 55 Shore A
<b>Recommended Cover Thickness:</b>	min. 12 mm - max. 20 mm
<b>Temperature resistance:</b>	Dry: continuous 130°C / peak 140°C Wet: continuous 80°C / peak 90°C
<b>Properties and advantages:</b>	Very good mechanical properties: excellent abrasion resistance High chemical stability: good resistance to acids and alkaline products High heat resistance
<b>Chemical resistance:</b>	Acid solutions: Excellent Alkaline solutions: Very good Hot water and steam: Very good Ozone: Very good Oil and grease: Moderate Aromatic solvents (toluene, benzene,...): Not suited Chlorinated solvents: Not suited Polar solvents (MEC, ether, acetate,...): Not suited
<b>Recommended cleaning products:</b>	Water and compatible solvents
<b>Remark:</b>	Substancja SVHC w stężeniu powyżej 0,1%: Tlenek ołowiu Informacja ta jest przekazywana zgodnie z artykułem 33 rozporządzenia REACH