


NipFoil-S-AS

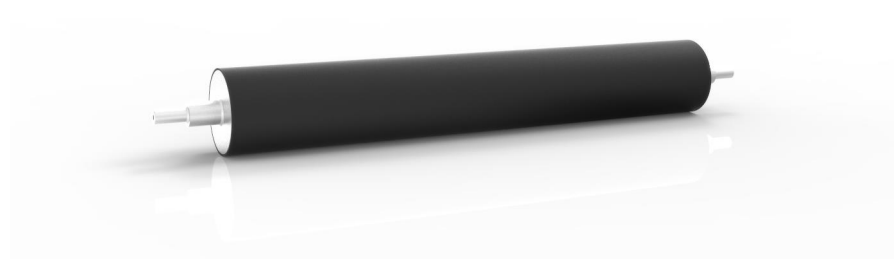

| | |
|---------------------------------------|---|
| Cover Type: | Rubber |
| Possible applications: | Production of plastic films, adhesives and flexible packaging : nip and press rollers, guiding and conveyor rollers, lamination. Contact and lay-on rollers for winding Nip rollers for corona treaters thanks to high antistatic properties. |
| Hardness Range: | 35, 50, 55, 60, 65, 70, 75, 80, 85, 90 Shore A |
| Recommended Cover Thickness: | min. 6 mm - max. 25 mm |
| Temperature resistance: | Dry: continuous 110°C / peak 130°C Wet: continuous 80°C / peak 90°C |
| Properties and advantages: | Bardzo dobre właściwości mechaniczne i dynamiczne. Neutralne zachowanie w kontakcie z wszelkiego rodzaju foliami z tworzyw sztucznych. Doskonała odporność na rozpuszczalniki polarne. Nie zalecany w kontakcie z olejami i smarami |
| Specific characteristics: | Antistatic |
| Chemical resistance: | Acid solutions: Excellent Alkaline solutions: Excellent Hot water and steam: Very good Ozone: Excellent Oil and grease: Not suited Aromatic solvents (toluene, benzene,...): Not suited Chlorinated solvents: Not suited Polar solvents (MEC, ether, acetate,...): Excellent Alcohols (ethanol, IPA,...): Excellent Ageing resistance: Excellent |
| Recommended cleaning products: | (Hot) water, acid and alkaline cleaners, IPA and alcohol, MEC, ether, ethyl acetate |

NipFoil-S-AS