


NipFoil-Plus

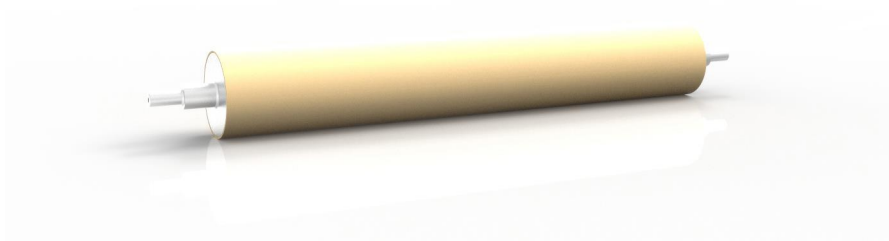

Cover Type:	Special rubber
Possible applications:	<p>Production of plastic film : nip rollers, deflector rollers, guiding and tensioning rollers, laminator rollers (not antistatic)</p> <p>Production of flexible packaging, adhesives, tape & label stock : high temperature laminator rollers</p> <p>Rollers used in the conversion of fabric, tissue, glass fibre, carbon fibre and non-woven materials</p> <p>Hacker rollers for the production of plastic granulate</p>
Hardness Range:	70 Shore A
Recommended Cover Thickness:	min. 12 mm - max. 25 mm
Temperature resistance:	Dry: continuous 110°C / peak 130°C Wet: continuous 70°C / peak 80°C
Properties and advantages:	<p>Good stability under load also at high temperature</p> <p>Very good abrasion and tear resistance</p> <p>Neutral behaviour in contact with various web types as plastic film, aluminium, non-woven etc.</p> <p>Good oil and grease resistance</p> <p>Not recommended for contact with polar solvents like MEC and acetates and with aromatic solvents like toluene and benzene</p>
Chemical resistance:	Acid solutions: Very good Alkaline solutions: Good Hot water and steam: Good Ozone: Excellent Oil and grease: Good Aromatic solvents (toluene, benzene,...): Moderate Chlorinated solvents: Not suited Polar solvents (MEC, ether, acetate,...): Not suited
Recommended cleaning products:	(Warm) water, soap, industrial cleaners and detergents, alcohol, (diluted) acid cleaners