


# Titan AS II

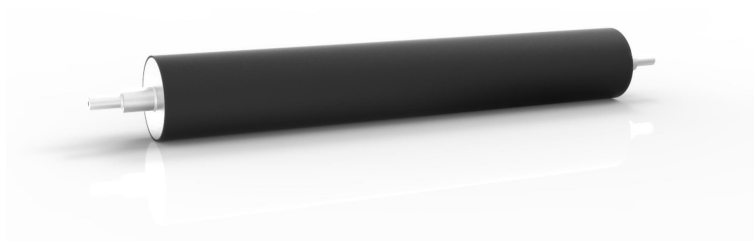

<b>Cover Type:</b>	Composite
<b>Possible applications:</b>	Paper Sheet Roll
<b>Hardness Range:</b>	90 Shore D
<b>Recommended Cover Thickness:</b>	min. 5 mm - max. 15 mm
<b>Temperature resistance:</b>	Dry: continuous 110°C / peak 120°C
<b>Properties and advantages:</b>	DoDoctorability Improved wear resistance in comparison to rubber covers High temperature resistance Ideal if problems of static electricity
<b>Specific characteristics:</b>	Antistatic
<b>Doctoring:</b>	Steel, fiberglass or plastic blades
<b>Possible surface design:</b>	Possibility of helicoidal, parallel or chevron grooving
<b>Chemical resistance:</b>	Acid solutions: Excellent Alkaline solutions: Very good Hot water and steam: Excellent Ozone: Excellent Oil and grease: Very good Chlorinated solvents: Good Polar solvents (MEC, ether, acetate,...): Good
<b>Remark:</b>	Reference list available on demand Good resistance to standard chemicals normally used in paper machines