


# Protectthane Plus

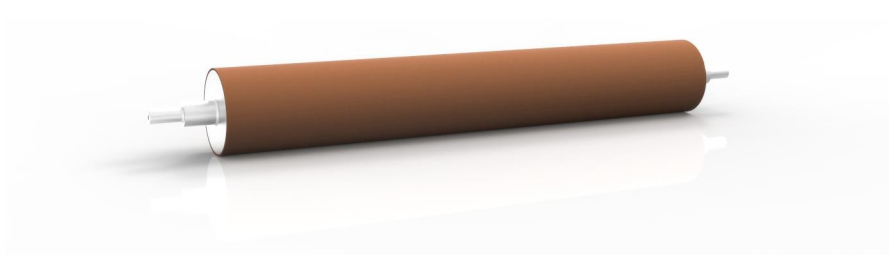

<b>Cover Type:</b>	Special polyurethane	
<b>Possible applications:</b>	Reel spools	
<b>Hardness Range:</b>	10, 15, 20, 25 PJ	
<b>Recommended Cover Thickness:</b>	min. 10 mm - max. 20 mm	
<b>Temperature resistance:</b>	Dry:	continuous 80°C / peak 110°C
<b>Properties and advantages:</b>	Vibration dampening Resistant to the propagation of cuts Wear resistance	
<b>Specific characteristics:</b>	Antistatic	
<b>Possible surface design:</b>	P (plain), G (grooved)	
<b>Chemical resistance:</b>	Acid solutions: Alkaline solutions: Hot water and steam: Ozone: Oil and grease: Chlorinated solvents: Polar solvents (MEC, ether, acetate,...):	Moderate Moderate Very good Very good Good Not suited Not suited
<b>Remark:</b>	Reference list available on demand Good resistance to standard chemicals normally used in paper machines	