


HanneTop-L

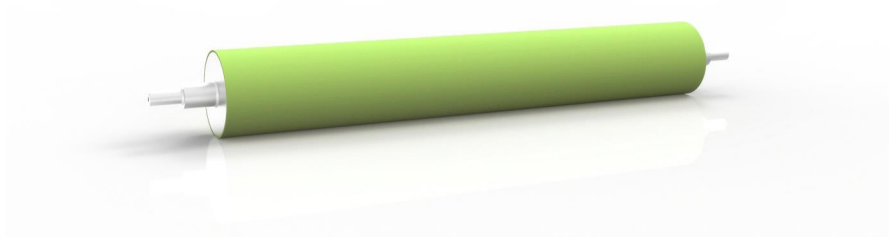

Cover Type:	Special rubber	
Possible applications:	All industries: rollers, wheels & parts submitted to high mechanical and/or dynamical load at elevated temperature Furnace entry/exit rollers Converting industries: conveyor, nip, backing, embosser and laminator rollers Rollers & wheels in contact with oil, petroleum or kerosene at high temperature	
Hardness Range:	70, 87, 96 Shore A	
Recommended Cover Thickness:	min. 15 mm - max. 30 mm	
Temperature resistance:	Dry: Wet:	continuous 145°C / peak 160°C continuous 80°C / peak 90°C
Properties and advantages:	Very high mechanical and dynamical properties - high load resistance Special high-load and high-temperature bonding technology High temperature resistance (up to max 160 °C) Excellent resistance to grease, mineral oil, petroleum and kerosene Light colour - non staining	
Chemical resistance:	Acid solutions: Alkaline solutions: Hot water and steam: Ozone: Oil and grease: Aromatic solvents (toluene, benzene,...): Chlorinated solvents: Polar solvents (MEC, ether, acetate,...): Alcohols (ethanol, IPA,...): Ageing resistance:	Moderate Good Good Very good Excellent Moderate Not suited Not suited Very good Excellent
Recommended cleaning products:	(Hot) water, soap, most industrial cleaners, alcohol, light fuel, turpentine, white spirit	