


# HanneStar-CR

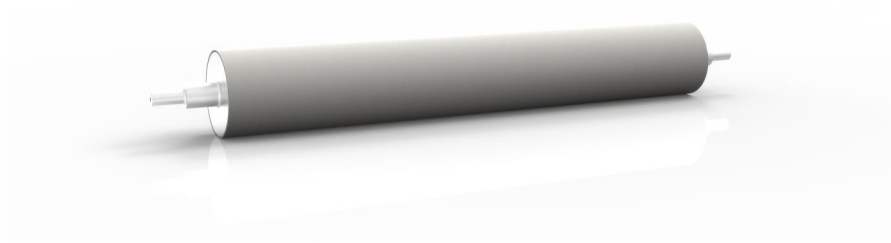

<b>Cover Type:</b>	Special rubber
<b>Possible applications:</b>	Metal strip production and conversion : - Bridle, steer and deflector rolls, pinch rollers - Rollers for metal strip transport where high grip and friction coefficient is needed, transport of humid or oiled strip  Textile industry, (Card)board industry, Paper conversion : transport rollers and wheels, tension rollers
<b>Hardness Range:</b>	75 Shore A
<b>Recommended Cover Thickness:</b>	min. 10 mm - max. 20 mm
<b>Temperature resistance:</b>	Dry: continuous 90°C / peak 100°C Wet: continuous 70°C / peak 80°C
<b>Properties and advantages:</b>	Special rubber with filler increasing the surface roughness after grinding  Improved grip and friction coefficient  Especially efficient on wet and oil
<b>Specific characteristics:</b>	Permanent surface roughness
<b>Chemical resistance:</b>	Acid solutions: Moderate Alkaline solutions: Good Hot water and steam: Not suited Ozone: Moderate Oil and grease: Excellent Aromatic solvents (toluene, benzene,...): Moderate Chlorinated solvents: Not suited Polar solvents (MEC, ether, acetate,...): Not suited Alcohols (ethanol, IPA,...): Very good
<b>Recommended cleaning products:</b>	(Hot) water, soap, most industrial cleaners, alcohol, light fuel, turpentine, white spirit