


# GelForm-SB

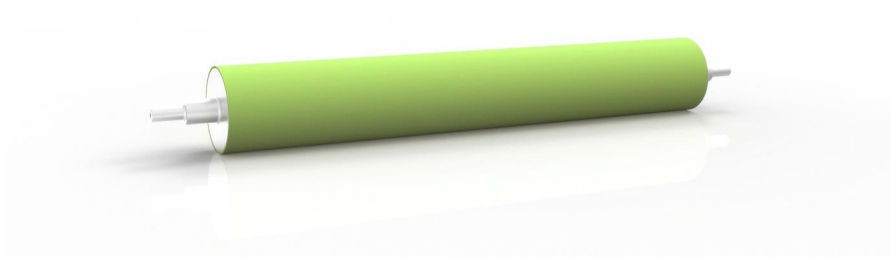

<b>Cover Type:</b>	Rubber	
<b>Possible applications:</b>	Counterparts for calendering and lamination of PVC and soft plastics (floor covering and sheet) Smooth embossing counterparts for PVC-sheet Counterparts for plastisol coating and impregnation	
<b>Hardness Range:</b>	75, 80 Shore A	
<b>Recommended Cover Thickness:</b>	Standard 10 mm	min. 25 mm
<b>Temperature resistance:</b>	Dry: Wet:	continuous 110°C / peak 125°C continuous 80°C / peak 90°C
<b>Properties and advantages:</b>	Good resistance to plasticizers used in the PVC- and soft plastics industry Clear colour, non staining in contact with hot PVC Good physical properties Excellent surface properties, neutral behaviour in contact with PVC and soft plastics	
<b>Chemical resistance:</b>	Acid solutions: Alkaline solutions: Hot water and steam: Ozone: Oil and grease: Aromatic solvents (toluene, benzene,...): Chlorinated solvents: Polar solvents (MEC, ether, acetate,...): Alcohols (ethanol, IPA,...):	Very good Very good Very good Excellent Not suited Not suited Not suited Excellent Excellent
<b>Recommended cleaning products:</b>	Polar solvents (MEK, ethyl acetate, alcohol...), detergents - avoid hydrocarbons !	